

30.11.2017

```
printf("Hallo");
```

```
printf("Hallo %s \n", name)
```


```
char a;  
char b[10];  
int i;
```

```
a = 'H';
```

```
b[9] = 'a';  
printf("%d", i);  
printf("%s \n", b);
```

```
scanf("%s", b);  
scanf("%i", &i);
```

Adresse von i

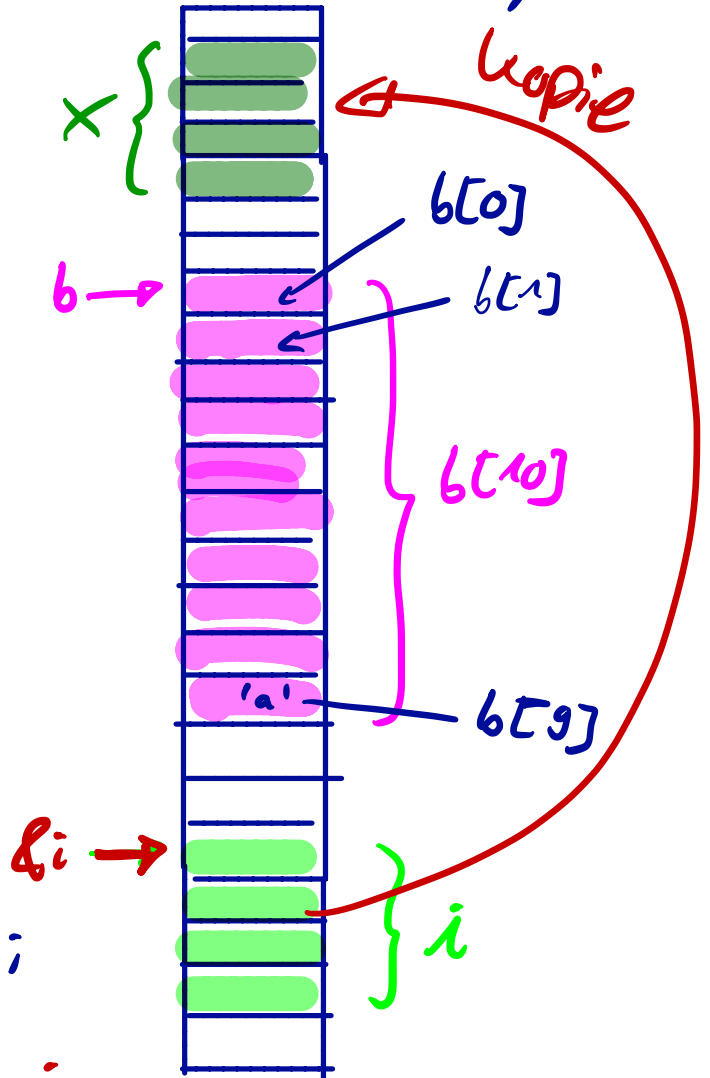

```
int main(...)  
{  
  int i;  
  f(i);  
}
```

```
int f(int x)  
{  
  int i;  
  x = 3;  
}
```